

Fin color:



Black

Line Voltage

R-30 S

40 degree beam

120V / 220V line current

Medium screw base: E26, E27

50,000 hour rated life

Replaces:

65W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

15 Watt typical (22W max)


Light Output

300-330 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (3) Color Temperatures:

-  **Warm** White (2700K)
-  **Neutral** White (3500K)
-  **Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with reverse phase
control dimmers or the continuous
current (sine wave) control dimmers.

See enluxLED.com for a list of tested
compatible dimmers.

Weight: 12 oz.

UL /CUL/CE /C-Tick rated




3-Year Warranty

Performance:

enLux RGB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency-15 Watts typical.


The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).



R30S Down Light Photometrics

0 ft Illuminances Distribution Ratio

3 ft				0.030	1.000
6 ft				0.113	0.250
9 ft			0.012	0.093	0.111
12 ft			0.028	0.058	0.063
15 ft		0.026	0.028	0.039	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft
					CL

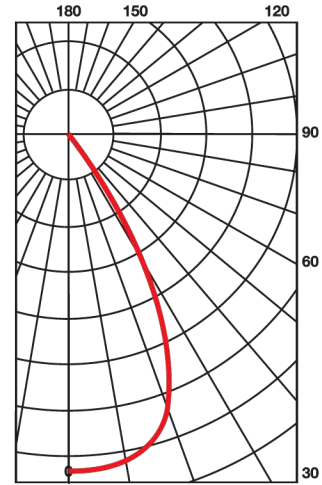


R30S Illuminance at Beam Centerline



White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0111X1	300	442.3	110.6	49.1	27.6	17.7
Neutral	3500°K	0113X1	315	478.2	119.5	53.1	29.9	19.1
Cool	4500°K	0114X1	330	514.0	128.5	57.1	32.1	20.6

Unit in lux
1 lux = 0.0929 footcandle (fc)

R30S White E26/E27 Base



Product Code	White Light CCT	Voltage	Fin Color
01	11 Warm (2700°K)	0 120V Dimmable	0 White*
	13 Neutral (3500°K)	1 110V Dimmable	1 Black
	14 Cool (4500°K)	2 220V (200-250V) Non-dimmable	2 Silver*
	91 Warm Hi-CRI (2700°K)	3 100V Dimmable	
	93 Neutral Hi-CRI (3500°K)	4 120V (100-130V) Non-dimmable	
	94 Cool Hi-CRI (4500°K)		

*Special Order Only

Examples

011102	R30 Spot	Warm White	120V	Silver Fin
011301	R30 Spot	Neutral White	120V	Black Fin
011430	R30 Spot	Cool White	100V	White Fin
019401	R30 Spot	Cool White Hi-CRI	120V	Black Fin

