


# T8 LED TUBE LIGHT

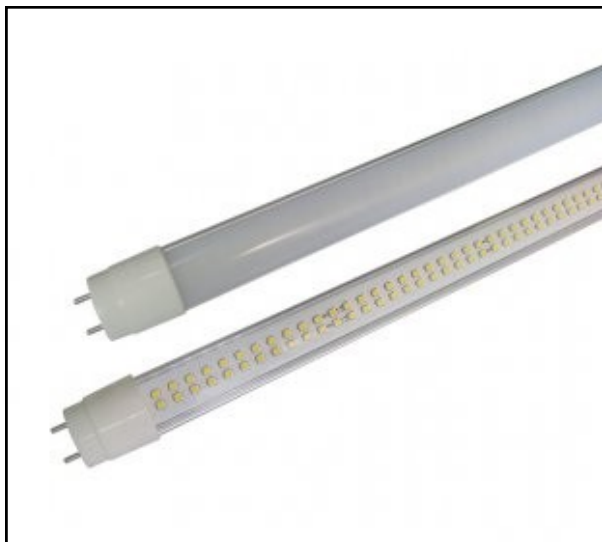

FIXTURE TYPE \_\_\_\_\_

JOB NAME \_\_\_\_\_

REP HUDNUT LED LIGHTING

PART NUMBER \_\_\_\_\_

## SPECIFICATIONS

Direct replacement for T8, T10, & T12 fluorescent\*\*\*\*

Universal 90—277 volt AC operation

No ballast = lower maintenance costs over lamp life\*\*\*\*

Standard T8 / T12 socket compatible (G13 bi-pin ends)

Powered from one end only to meet UL safety requirements.

Aluminum heat sink backing ensures maximum LED life

Instant on to full light output even in cold environments

Operates from minus 40 degrees F. through plus 122 degrees F.

No mercury, no lead, no glass

Power factor >0.9

Lumen output 24" = 860+ @ 9 watts

Lumen output 48" = 1735+ @ 18 watts

Lumen output 60" = 2160+ @ 22 watts

High 80+ CRI white LEDs

>50,000 hour lamp life to 70% original output

UL listed 120-277VAC

Full 5 year limited warranty

RoHS compliant, recyclable

## ORDERING INFORMATION

<u>SERIES</u>	<u>LENGTH</u>	<u>LENS</u>	<u>LIGHT</u>	<u>VOLTS</u>	<u>BASE</u>	<u>OPTIONS***</u>
TL-SH	24"	CL = clear	35 = 3500k	120-277	GU13	
	36"	FL = frost	40 = 4000k			
	48"		55 = 5500k			
	60"					
	72"					

## NOTES

\*\*\*Other options are available. Contact Hudnut LED Lighting Solutions for additional information

\*\*\*\*ALWAYS REMOVE BALLAST BEFORE INSTALLING LED T8 TUBE LIGHT\*\*\*\*

\*\*\*\*CONSULT INSTALLATION INSTRUCTIONS FOR WIRING GUIDE\*\*\*\*

Product may differ slightly from photo. All values are nominal.

# HUDNUT LED LIGHTING

11916 NE SUMNER STREET PORTLAND, OREGON 97220 503-233-8088 WWW.HUDNUT.COM INFO@HUDNUT.COM